

RELY ON EXCELLENCE

## H3B

Mechanical seals | Mechanical seals for pumps | Pusher seals



### Advantages

Excellent torque transmission due to clutch drive between seal head and drive collar.

### Operating range

Pressure:  $p = 12$  bar (174 PSI)

Temperature:

$t = -20$  °C ...  $+160$  °C ( $-4$  °F ...  $320$  °F)

Sliding velocity:  $v_g = 20$  m/s (66 ft/s)

Viscosity: ... 300 mPa·s

Solids content: ... 7 %

### Materials

Seal face and seat: Silicon carbide (Q1),

Tungsten carbide (U7)

Secondary seals: FKM (V)

Metal parts: CrNiMo steel (G)

### Standards and approvals

- ISO 3096


### Recommended applications

- Process industry
- Oil and gas industry
- High viscous media (tar, heavy oils)
- Process pumps

### Features

- Single Seal
- Balanced
- Independent of direction of rotation

RELY ON EXCELLENCE

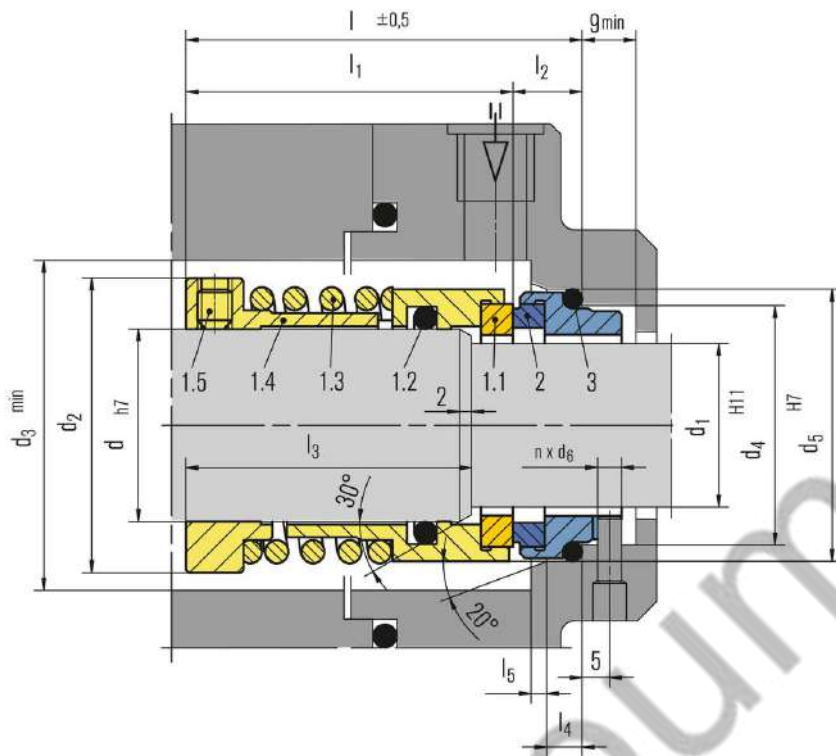

**Item Description**

- 1.1 Seal face
- 1.2 O-Ring
- 1.3 Spring
- 1.4 Drive collar
- 1.5 Set screw
- 2 Seat
- 3 O-Ring

## RELY ON EXCELLENCE

### Dimensions

d	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	d <sub>6</sub>	l	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>
24	20	38	40	29	35	3	62	49	13	42	5	2
26	22	40	42	31	37	3	62	49	13	42	5	2
28	24	42	44	33	39	3	64	51	13	44	5	2
30	25	44	46	34	40	3	64	51	13	44	5	2
33	28	47	49	37	43	3	64	51	13	44	5	2
35	30	49	51	39	45	3	68	55	13	48	5	2
38	33	54	58	42	48	3	71	58	13	51	5	2
40	35	56	60	44	50	3	73	60	13	53	5	2
43	38	59	63	50	56	4	76	61	15	53	5	2
45	40	61	65	52	58	4	76	61	15	53	5	2
48	43	64	68	55	61	4	76	61	15	53	5	2
50	45	66	70	57	63	4	80	65	15	57	5	2
53	48	69	73	60	66	4	80	65	15	57	5	2
55	50	71	75	62	68	4	82	65	17	57	5	2
58	53	76	83	65	71	4	84	68	16	59	5	2
60	55	78	85	67	73	4	84	68	16	59	5	2
63	58	81	88	70	79	4	84	68	16	59	7	2.5
65	60	84	90	72	81	4	88	72	16	63	7	2.5
68	63	87	93	75	84	4	88	72	16	63	7	2.5
70	65	90	95	77	86	4	89	73	16	64	7	2.5
75	70	95	104	83	92	4	94	75	19	66	7	2.5
80	75	100	109	88	97	4	94	75	19	66	7	2.5
85	80	107	114	96	105	4	100	81	19	72	7	2.5
90	85	112	119	101	110	4	100	82	18	72	7	2.5
95	90	119	124	106	115	4	105	87	18	77	7	2.5
100	95	124	129	111	120	4	105	87	18	77	7	2.5
105	100	129	134	116	125	4	105	87	18	77	7	2.5

Dimensions in millimeter