

SW Range™

Water Management Systems



Features

- 304 SS vessel construction
- Water regulator
- Flow indicator
- Supplied as complete system
- Non-return valve

Benefits

- Suitable for a range of challenging environments
- Maintains vessel water level and pressure
- Visually alerts the user of an inboard seal failure
- The SW Range has all the components required for fast and easy installation
- Protects plant water supply from contamination and maintains vessel pressure in the event of supply interruption



SW Range

The AESSEAL® SSE10™ and SSE25™ vessels are used as the core of a modular Water Management System Range (SW2™ & SW3™). The environmentally friendly SW Range have significantly contributed to the global drive for water conservation. AESSEAL® Water Management Technology can save 6.3 Million litres / 1.7 Million US gallons of water per pump per year! The Water Management Range starts with the SW2™, which is piped as an API Plan 53A configuration (see Figure 1). This is a self regulating system which can both refill and re-pressurise itself upon any mechanical seal upsets. The SW3™ is piped in the same way as the SW2™ and has the addition of finned tubing to deal with high heat applications. All vessels are designed and manufactured in accordance with ASME VIII Div.1 and all SW systems comply with Pressure Equipment Directive PED (2014/68/EU)

SW Range Operating Principle

(SW2™ shown below)

The SW2™ is connected to the plant water line. Water enters the SW2™ through the non-return valve. The water supply regulator is used to set the barrier fluid pressure. (please note that the SW2™ System can only regulate the water pressure available in the plant water line)

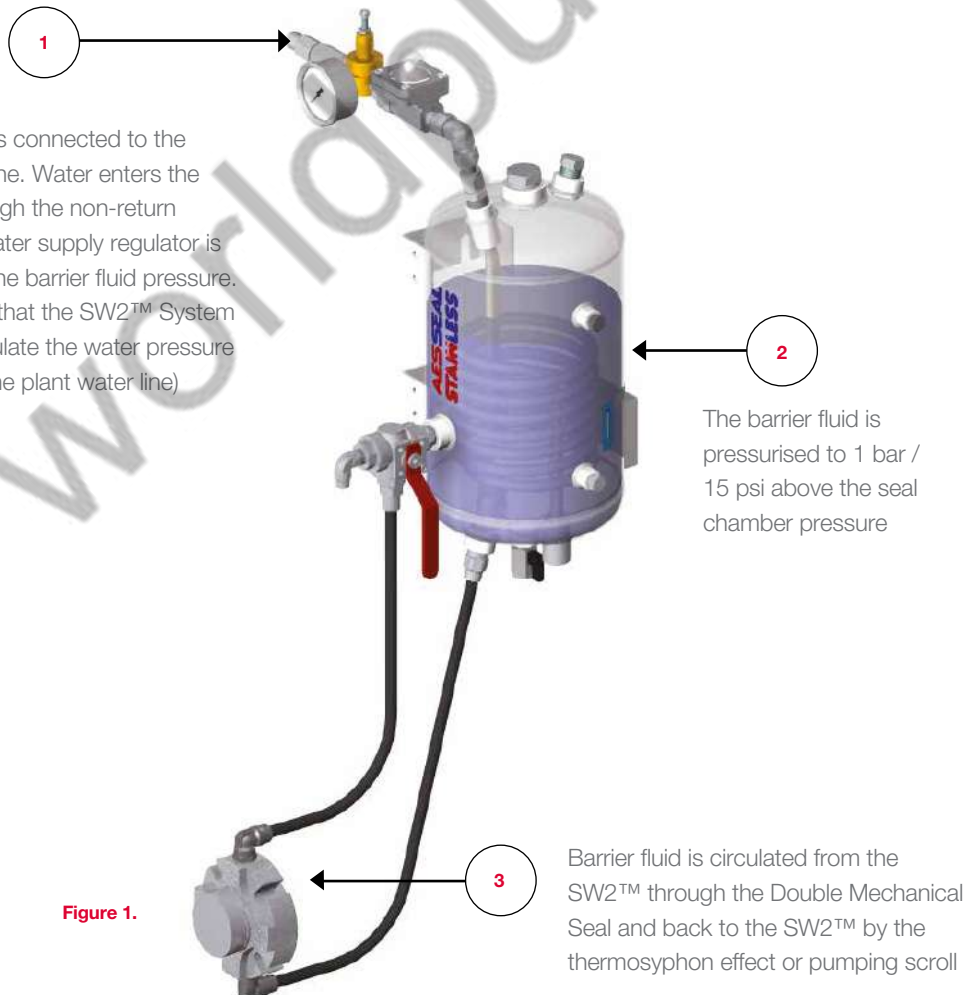


Figure 1.

Specifications



System Specification:

Maximum Set Pressure: 6 barg / 87 psig*
Maximum Design Pressure: 10 barg / 145 psig
Minimum Working Pressure: 1 barg / 15 psig
Maximum Temperature: 80°C / 176°F (with suitably rated piping / hosing)
Minimum Temperature: 0°C / 32°F**

* 8 Barg can be achieved with optional expansion vessel
** Protection against freezing required for water below 0°C

Vessel:

Construction: 304 Stainless Steel
Capacity: 10 litres / 2.64 gal (US) Or 25 litres / 6.60 gal
Connections: 1/2" NPT for seal feed and return hoses
Finish: White powder coated
Designed to: ASME VIII Div.1



SW Range System Components:

Non-Return Valve: Stainless Steel
Water Supply Regulator: Brass, max outlet pressure 10 bar / 150 psi (Stainless Steel option available)
Pressure Gauge: Brass (Stainless Steel option available)
Flow Indicator: Stainless Steel
Ball Valve (Drain): Nickel plated brass
12mm (1/2") Hose Kit (SW2™ Only): Nylon
3-way valve (SW2™ Only): Nickel plated brass (Stainless Steel option available)
Finned Tubing (SW3™ Only): Cupro Nickel

Optional Extras:

Cooling Coil
Finned Tubing: Cupro Nickel
Pressure Switch: Safe area, explosion proof and intrinsically Safe options
Level Switch: Safe area, explosion proof and intrinsically Safe options
Stainless Steel Braided flexible hose
Hard pipe kit
In-line Water Filter: UV stabilized material, 8 bar / 120 psi max pressure (we strongly recommend the use of an in-line filter with the SW range)
Expansion Vessel: Stainless steel, used for higher set pressures

The SW Range is commonly used with the following seals:



DMSF™



CDSA™

Barrier & Buffer Fluid Systems For Use With Double Mechanical Seals

AESSEAL® supplies an extensive range of barrier and buffer fluid systems for use with double mechanical seals. Wherever possible AESSEAL® prefers to supply both the seal and the system. In addition the company will suggest suitable barrier or buffer fluids for most applications, based on extensive field experience. AESSEAL® accepts no responsibility for any problems associated with system design, installation, operation, or the use of an unsuitable barrier or buffer fluid, where the fluid, seal or any part of the system have not been specified and / or supplied by AESSEAL®.



ENVIRONMENTAL TECHNOLOGY

To experience the exceptional, please contact your local representative. Discover full details on our website:

www.aesseal.com

This brochure is fully recyclable. When laminated, a sustainable, biodegradable and recyclable lamination is used.

For further information and safe operating limits contact our technical specialists at the locations below.



Use double mechanical seals with hazardous products.

Always take safety precautions:

- Guard your equipment
- Wear protective clothing

WARNING

AESSEAL plc is certified to ISO 9001, ISO 14001, ISO/IEC 20000, ISO/IEC 27001, ISO/TS 29001, ISO 37001, ISO 45001 & ISO 50001

UK Sales & Technical advice:

AESSEAL plc
 Mill Close
 Bradmarsh Business Park
 Rotherham,
 S60 1BZ, UK
 Tel: +44 (0) 1709 369966
 E-mail: enquiries@aesseeal.info
www.aesseal.com



AESSEAL plc is Net Zero for Manufacturing in the UK



USA Sales & Technical advice:

AESSEAL Inc.
 355 Dunavant Drive
 Rockford,
 TN. 37853,
 USA
 Tel: +1 865 531 0192
 E-mail: usa@aesseeal.com
www.aesseal.com

Important: Since the conditions and methods of use of this product are beyond our control, AESSEAL plc expressly disclaims any and all liability resulting or arising from any use of this product or reliance on any information contained in this document - AESSEAL plc standard conditions of sale apply. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time. AESSEAL® is a Registered Trademark of AES Engineering Ltd, AESSEAL plc recognizes all trademarks and trademark names as the property of their owners.